

TECHNICAL CHARACTERISTICS

MGINRB

# Ginger


## Table

Craftsmanship and technique go hand-in-hand in the Ginger table design. Available in different heights, this table stands out for the complex wooden curvature of its legs and the round shapes of its table top.

DESIGNED BY SEBASTIAN HERKNER



**ondarreta**

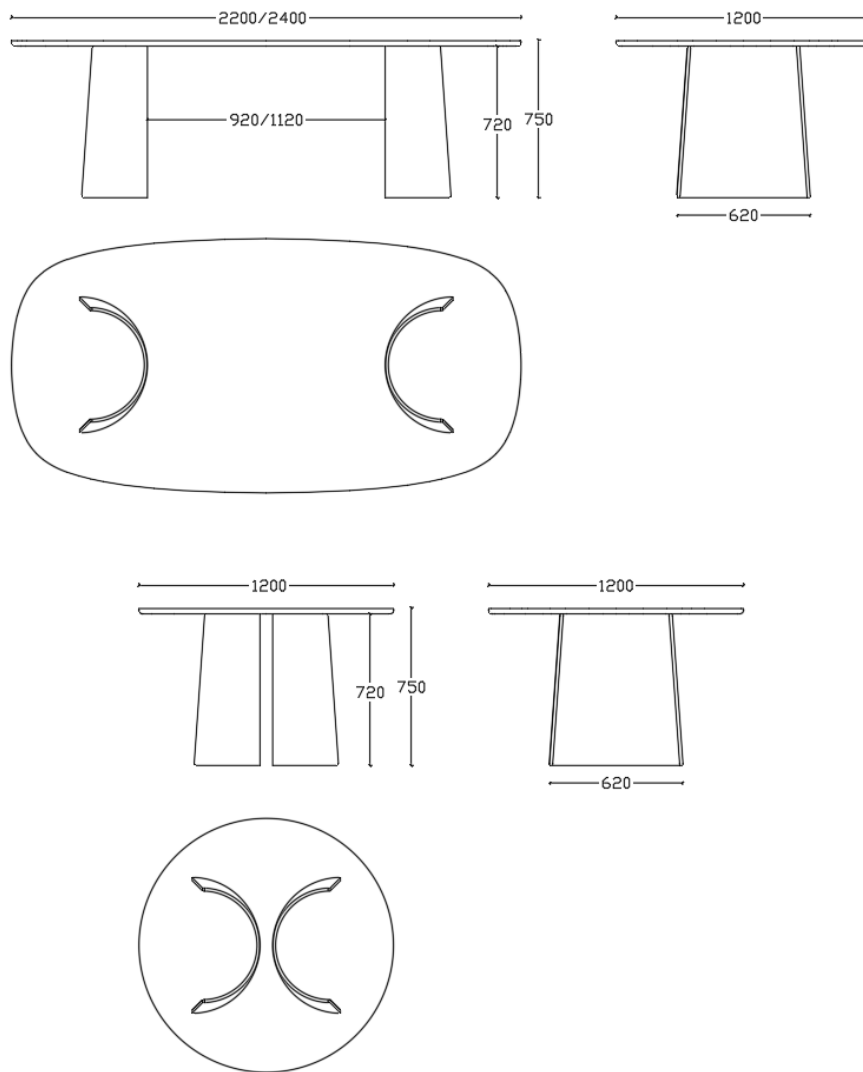

## DIMENSIONS

Height: 75 cm (29,5")

Free height: 72,5 cm (28,5")

220 cm x 120 cm (86,6" x 47,2") [width x depth]

240 cm x 120 cm (94,5" x 47,2") [width x depth]

120 cm (47,2") [diameter]

## WEIGHT

60 kg [ 132,3 lb ] (220x120)

64 kg [ 141,1 lb ] (240x120)

32 kg [ 70,5 lb ] (ø120)

## PACKAGING

Palletised

220 x 120 cm

Box 1: 235 cm x 130 cm x 10 cm (92,5" x 51,2" x 3,9")

Box 2: 62 cm x 50 cm x 80 cm (24,4" x 19,7" x 31,5")

Box 3: 62 cm x 50 cm x 80 cm (24,4" x 19,7" x 31,5")

240 x 120 cm

Box 1: 255 cm x 130 cm x 10 cm (100,4" x 51,2" x 3,9")

Box 2: 62 cm x 50 cm x 80 cm (24,4" x 19,7" x 31,5")

Box 3: 62 cm x 50 cm x 80 cm (24,4" x 19,7" x 31,5")

ø 120 cm

Box 1: ø130 cm x 10 cm (ø 51,2 x 3,9")

Box 2: 62 cm x 50 cm x 80 cm (24,4" x 19,7" x 31,5")

Box 3: 62 cm x 50 cm x 80 cm (24,4" x 19,7" x 31,5")

## ACCESORIES

Top Access inlay with cover in the same finish as the tabletop

Cable tray for Top Access inlay

Electrification fixed to the cable tray

## CERTIFICATION

Designed and certified in accordance with the Ecodesign standard UNE-EN ISO 14006:2011

PEFC certify wood

## ORIGIN

100% Made in Europe

## DESIGN

Sebastian Herkner

**ondarreta**



## **COMPONENTS**

### **LEGS**

#### **Oak**

Oak wood on 15 mm (0,6") thick beech. It is made with especially treated sheets to optimize bending, reinforced with alternate arrangement of fibers to gain resistance, glued, pressed and CNC machined.

#### **Finish**

Stained

### **TABLETOP SUPPORT**

#### **Steel**

5 mm (0.2") thick laser cut steel sheet.

#### **Finish**

Epoxy black

### **TABLETOP**

#### **Oak + birch plywood**

European oak sheet glued and pressed in high temperatures on a Birch plywood wood table with beveled chants.

#### **Arpa fenix + birch plywood**

Combination of arpa fenix sheet and beveled birch plywood. Arpa fenix is an extremely opaque, anti-fingerprint and nanotechnological material that heals superficial micro-scratches.

#### **Technical characteristics:**

Urea-formol glue: low formaldehyde emission (E1 European Normative)

The wood has the PEFC certificate.

## **WOOD FINISH**

### **STAIN**

Pigmented enamel with a transparent stain coating. Reactive drying paints: excellent adherence between layers and better mechanical resistance.

#### **Technical characteristics:**

Satisfying UNE-EN 71-3 normative; Formaldehyde free compounds.

## **METAL FINISHES**

### **EPOXYS**

Powder covering formulated with polyester resins, with good both mechanical and chemical properties, outdoor maximum resistance and noxious compounds free. Electrostatic application and oven cured at 200°C (392°F).

#### **Technical characteristics:**

Thickness (ISO 2360): between 60 and 90 µm.

Adherence (ISO 2409): Grade: 0 (maximum adherence)